




**EASY 3 COLORS**  
**SELECCTOR**  
3000K • 4000K • 5000K

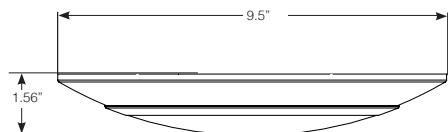

**FEATURES**

The RL870 has been engineered for easy installation over standard 4" junction boxes. Fixture comes with an easy selector switch that allows the user to switch between 30K/40K/50K in the field. Smooth, comfortable illumination combines with energy-efficiency for a reliable incandescent replacement.

|               |  |
|---------------|--|
| APERTURE      | 8"   |
| LUMENS        | 2000   |
| CCT           | 30K/40K/50K  |
| CRI           | 90+  |
| COLOR QUALITY | 3-Step MacAdam Ellipse   |
| FINISH        | White  |
| DIMMING       | DIMTR (Triac), DIM10 (0-10V Dimming)                           |
| LIFETIME      | 50,000 Hours   |
| WARRANTY      | 5-year warranty for parts and components (labor not included). |

**Field-Adjustable CCT Selector Switch**

A CCT selector switch is clearly visible and identifiable on the back of the fixture for easy adjustability in the field. Switch between 30K/40K/50K for creating multiple lighting environments in one luminaire.

| NOMINAL LUMENS | DELIVERED LUMENS | WATTAGE |
|----------------|------------------|---------|
| 2000           | 2063             | 27W     |

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

EXAMPLE: **RL870-2000L-DIM10-MVOLT-30K/40K/50K-90-WH**

| TYPE  | LUMEN                                      | CCT                                  | CRI                          | FINISH                              | OPTIONS  |
|-------|--|--------------------------------------|------------------------------|-------------------------------------|--|
| RL870 | <input type="checkbox"/> 2000L-DIM10-MVOLT | <input type="checkbox"/> 30K/40K/50K | <input type="checkbox"/> 90+ | <input type="checkbox"/> WH (White) | <input type="checkbox"/> GU24SA<br>GU24 SOCKET ADAPTER |

#### COMPATIBLE JUNCTION BOXES




3.5" Round  
(Plastic)



4" Square  
(Plastic)



4" Octagonal  
(Metal)



4" Square  
(Metal)



Fire Rated  
J-Box

**Note:** A 2-1/8" deep octagon junction box is recommended for through circuit wiring applications.

#### RECOMMENDED DIMMERS FOR ELITE RL870 LED SYSTEM

##### LUTRON DIMMERS (DIMTR)

|                   |                   |
|-------------------|-------------------|
| Diva DVCL-153P    | Maestro MRF2-6ND  |
| Skylark CTCL-153P | NovaT NTLV-600    |
| Nova N-600        | Diva DVELV-300P   |
| NovaT NT-600      | Skylark SELV-300P |
| Skylark S-600     | Nova NELV-450     |
| Ariadni AY-600P   |                   |
| Nova NTLV-600     |                   |
| Nova NLV-600      |                   |

#### INSTALLATION

- Custom designed bracket included for mounting in standard size junction box.