

Date:	Project:
Prepared for:	Type:
Comments:	

LED WRAPAROUND WR48-30W-46W-VAR-V2



PERFORMANCE SPECIFICATIONS

Power	46W/38W/30W
Equivalent Power	120W
Input Voltage	120-347Vac
Input Current	0.5A
Lumens (Up to)	5520lm at 46W / 4560lm at 38W / 3600lm at 30W
Efficacy	120lm/W
Color Rendering Index (CRI)	+80
Lifetime	50,000 hours
Dimming	0-10V dimming
Power Factor	0.9
Total Harmonic Distortion	<15%

PHYSICAL SPECIFICATIONS

Dimensions	1129mm x 135.6mm x 49.4mm
Weight	4 lbs (1.8 kg)
Beam Angle	120°
Operating Temperature	-20°C to 40°C
Environment	Damp
Type of lens	Polycarbonate opaque
Body material	SPCC (Steel Plate Cold Commercial)


ORDERING SPECIFICATIONS

Model Number	WRP48L0046W-DHV13P3C-V2
Years of Warranty	5 years
Color Temp	3500K/4000K/5000K (Color Selectable)




ORDERING INFORMATION:

 Stock item. Same Day Shipping for orders placed by 3pm EST

SERIES	INPUT VOLTAGE	POWER (SELECTABLE)	LUMENS	COLOR TEMPERATURE (SELECTABLE)	DLC PRODUCT ID	ORDERING CODE
LED WRAPAROUND	120-347Vac	46W/38W/30W	5520lm @ 46W	3500K/4000K/5000K	S-JXDZ7W S-HN1VGN	WR48-30W-46W-VAR-V2 

ADDITIONAL ACCESSORIES (sold separately)

Suspension Mounting kit



LS-AC-S


Motion Sensor




LS48-MWS-V1

PHOTOMETRIC REPORT

Polar Candela Distribution

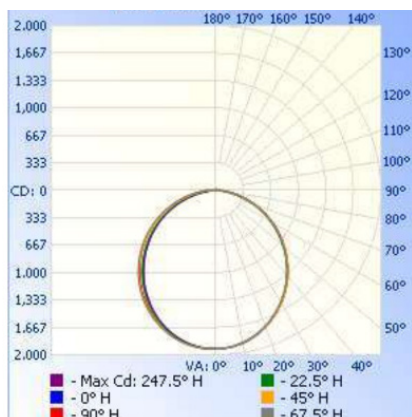

Illuminance at distance

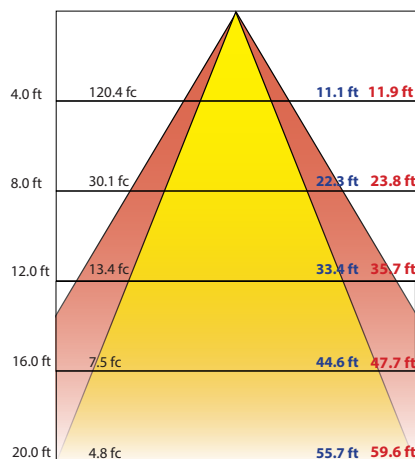


Vertical spread : 108.7°

Horizontal spread : 112.2°

Zonal Lumen Summary

Zone	Lumens	Lamp%	Luminaire %
0-30	1,484.8	26.8%	26.9%
0-40	2,422.1	43.8%	43.8%
0-60	4,260.5	77%	77%
60-90	1,209.4	21.9%	21.9%
70-100	557.5	10.1%	10.1%
90-120	31.4	0.6%	0.6%
0-90	5,470.0	98.9%	98.9%
90-180	59.9	1.1%	1.1%
0-180	5,529.8	100%	100%

DIMENSIONS:

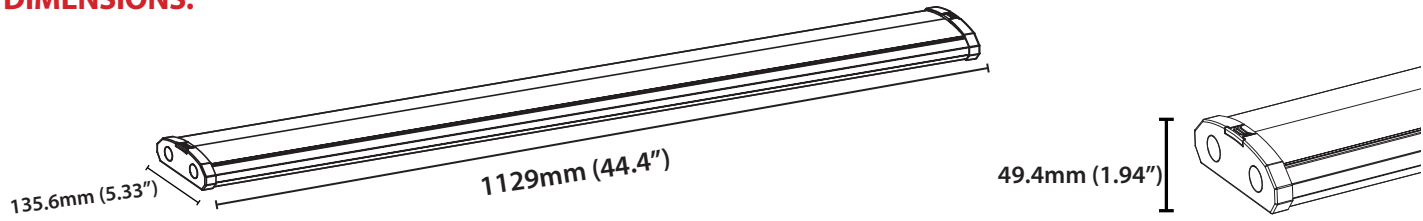

PRODUCT IMAGES:

