

ULTRATHIN PRODIGY

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____
 Qty: _____
 Date: _____
 EEL Rep: _____



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The Ultrathin Prodigy remote driver box allows for quick, simple and housing-free installation. This fixture provides high-quality light output and efficiency while eliminating the need for recessed housings. The innovative, slim design allows for easy retrofit, remodel or new construction installation. With its narrow design, the UTP downlight is wet location listed – making it ideal for use in residential, hospitality, commercial and multifamily applications.

SPECIFICATION FEATURES

Construction

- Polycarbonate Lens
- Aluminum lamp housing
- Aluminum driver box
- FT4 Flame Test rating of output cable (all except 4" 120V)
- FT1 Flame Test rating of output cable (4" 120V)

Mounting

- Cut hole in ceiling by using the template provided and snap fixture in opening with attached spring clips.

Finish

- Matte White

Compliance

- cUL (applicable on selected models)
- Energy Star (applicable on selected models)
- ETL rated (applicable on selected models)
- FCC Rated
- IC / Airtight Rated
- Suitable for damp locations (4" 120V)
- Suitable for wet locations (all except 4" 120V)

Warranty

- 5-Year Warranty (Standard)
- 10-Year Limited Warranty (Optional)




ULTRATHIN PRODIGY


UTP SERIES

Wattage(s)	4" - 9W(120V) 12W(120-347V)
	6" - 12W(120V) 15W(120-347V)
	8" - 24W(120-277V) 20W(120-347V)
Voltage	4" & 6" - 120V
	8" - 120-277V
	4" 6" & 8" - 120-347V
Dimmable	4" & 6" (120V) - Triac
	4" 6" (120-347V) and 8" - 0-10V
CCT	4" - 3000K/4000K/ 5CCT-A (27K/30K/35K/40K/50K)
	6" - 5CCT-A (27K/30K/35K/40K/50K)
	8" - 3000K/4000K
	5CCT-A (27K/30K/35K/40K/50K)
CRI	4" - 80
	6" & 8" - 90(120V) 80(120-347V)
Efficacy	Up to 79lm/W
Power Factor	>0.9
THD	<20%
Operating Temperature	-25°C to 35°C
Inherent Surge Protection	2.5kV
Beam Angle	110°
Lumen Maintenance	L70>81,000h


UTP 4" Matte White 120V

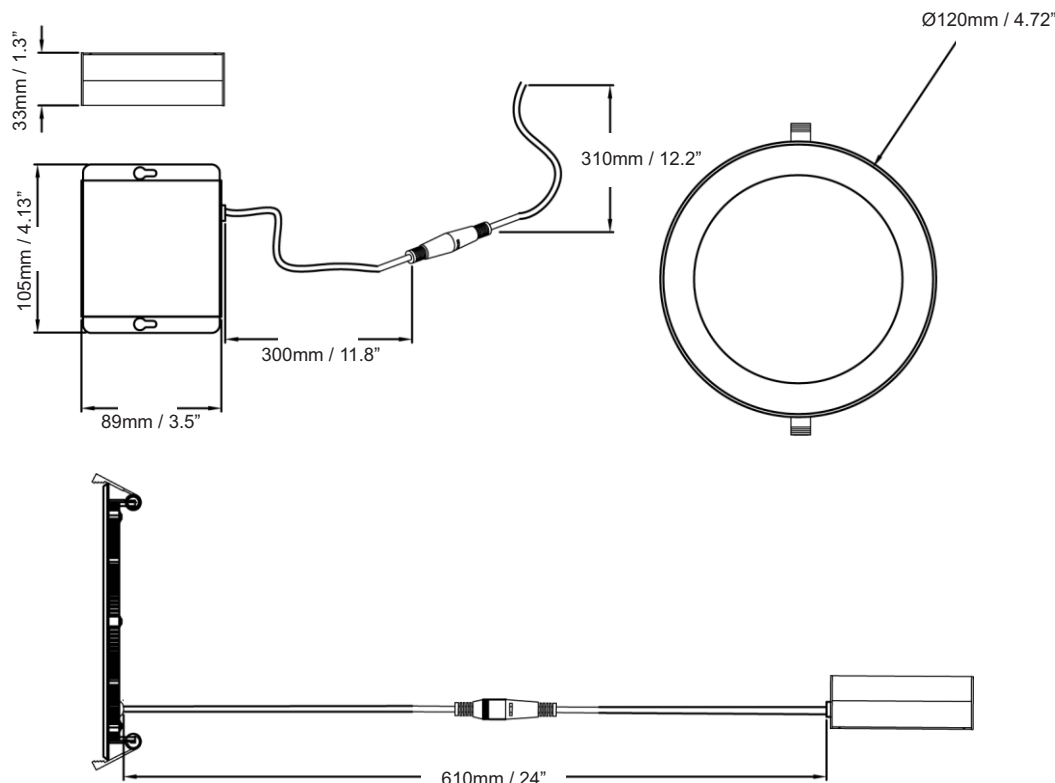


UTP 4" Matte White 120-347V

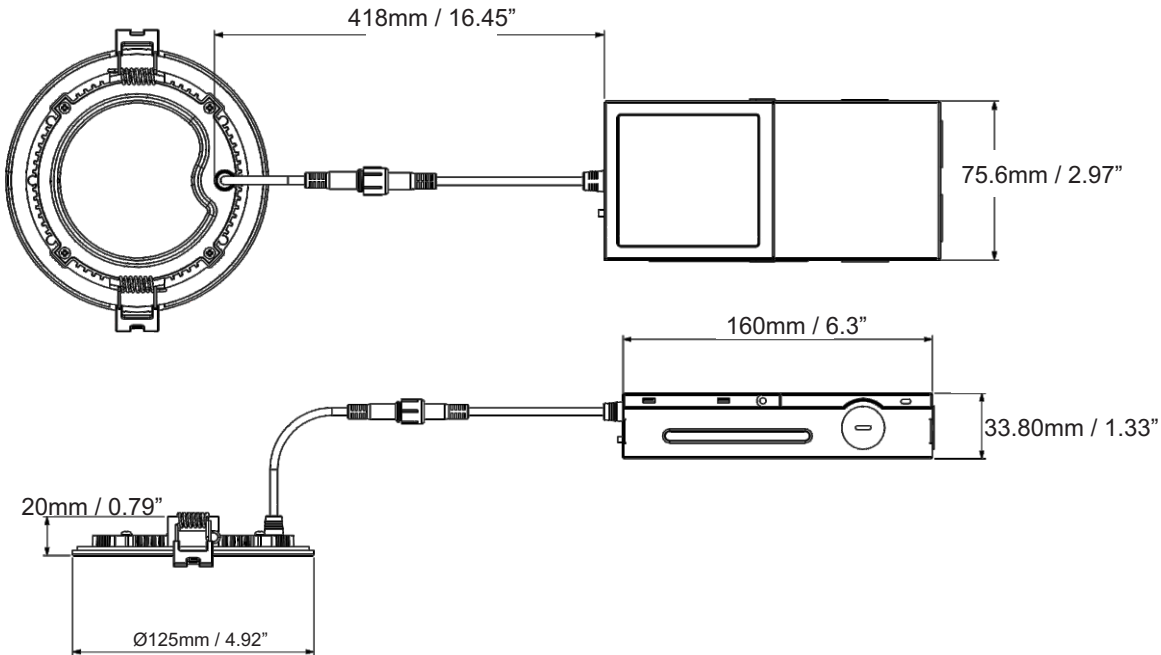


UTP 6" Matte White 120V

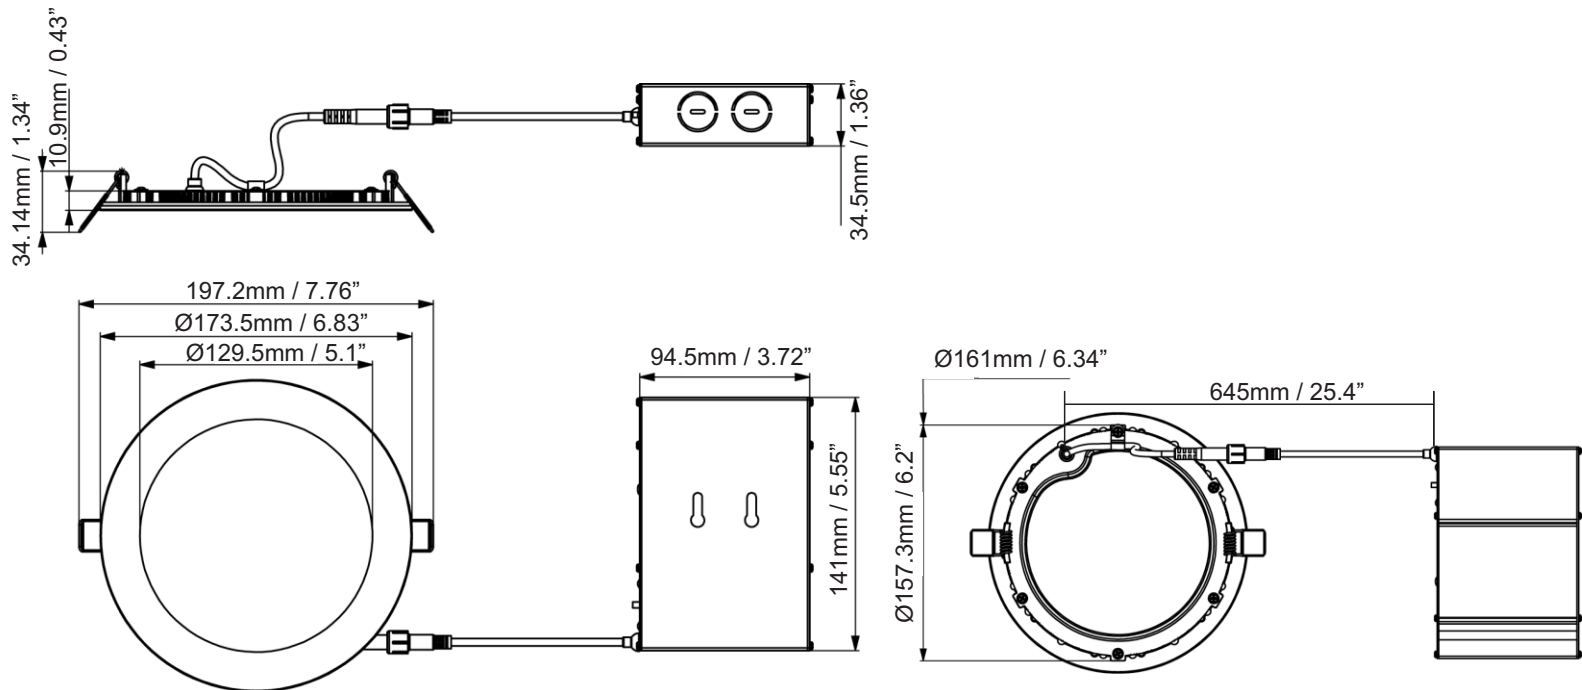


UTP 6" Matte White 120-347V

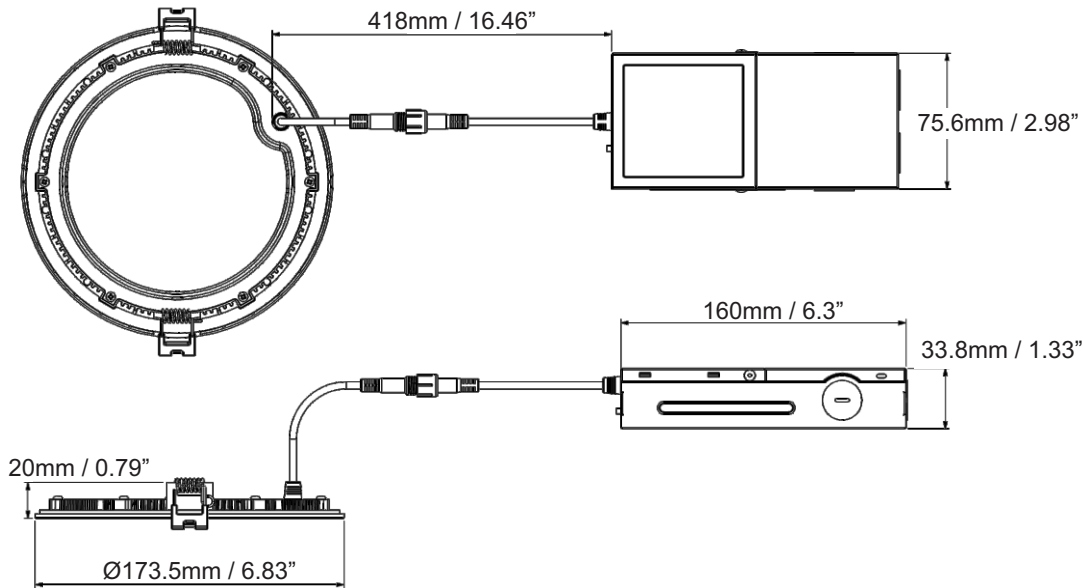

UTP 8" Matte White 120-277V

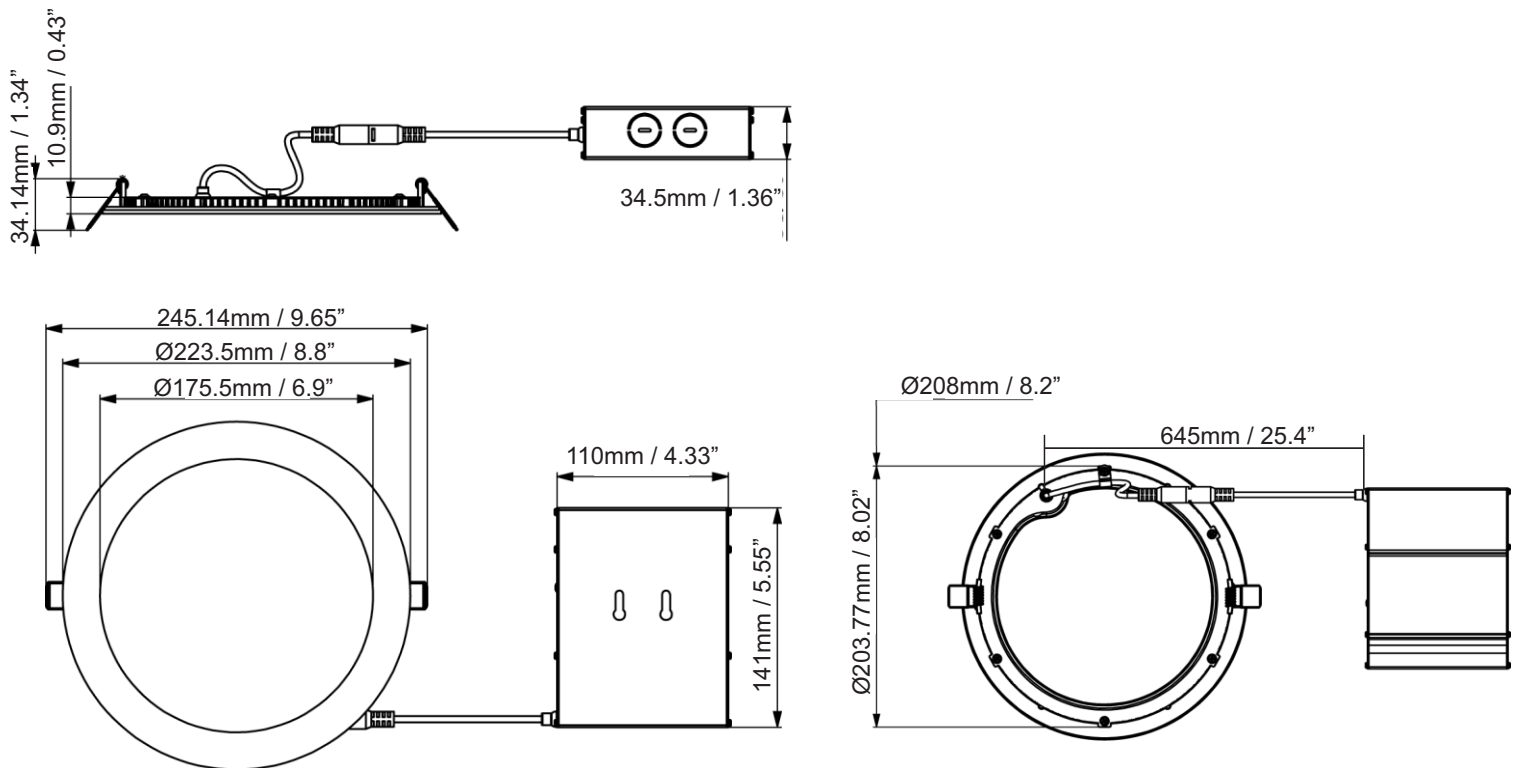

UTP 8" Matte White 120-347V

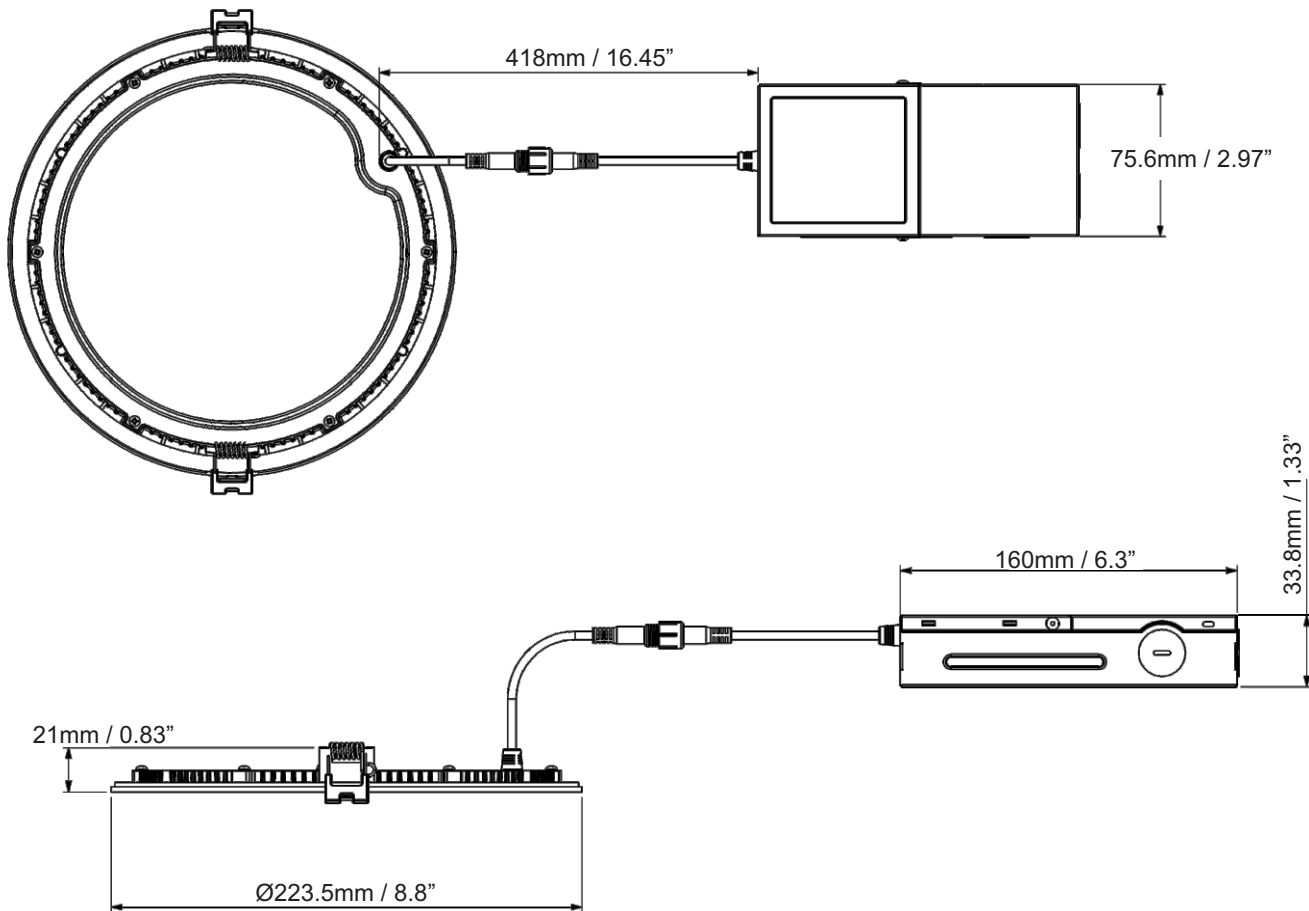

ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Efficacy (lm/W)	Colour Temp. (K)	CRI	Certification
 UTP-R4213 Matte White 9W30K-120V-Triac-CRI80	600	9.5W	120V	67	3000K	80	 
 UTP-R4233 Matte White 9W40K-120V-Triac-CRI80	600	9.5W	120V	67	4000K	80	 
 UTP-R4486 Matte White 12W5CCTA-120347V-DIM-CRI80	900	12W	120-347V	75	5CCT-A: 2700K/3000K/3500K/ 4000K/5000K	80	 
 UTP-R6483 Matte White 12W5CCTA-120V-Triac-CRI90	900	12W	120V	75	5CCT-A: 2700K/3000K/3500K/ 4000K/5000K	90	 
 UTP-R6586 Matte White 15W5CCTA-120347V-DIM-CRI80	1125	15W	120-347V	75	5CCT-A: 2700K/3000K/3500K/ 4000K/5000K	80	 
 UTP-R8686 Matte White 20W5CCTA-120347V-DIM-CRI80	1400	20W	120-347V	70	5CCT-A: 2700K/3000K/3500K/ 4000K/5000K	80	 
 UTP-R8714 Matte White 24W30K-120277V-010V-CRI90	1900	24W	120-277V	79	3000K	90	 
 UTP-R8734 Matte White 24W40K-120277V-010V-CRI90	1900	24W	120-277V	79	4000K	90	 

NOTE:

- Lumens are estimated

Accessories (optional):

UTLED-4-GOOF RING | 4" Goof Ring (see goof ring spec sheet for more details)
 UTLED-6-GOOF RING | 6" Goof Ring (see goof ring spec sheet for more details)
 UTLED-8-GOOF RING | 8" Goof Ring (see goof ring spec sheet for more details)
 UTLED 4-MP | 4" Mounting Plate
 UTLED 6-MP | 6" Mounting Plate
 UTLED 4-MP-S | 4" Mounting Plate (short)
 UTLED 6-MP-S | 6" Mounting Plate (short)
 TRIM4BK | Face Plate in Black for 4" UTP (120-347 only)
 TRIM4BN | Face Plate in Brushed Nickel for 4" UTP (120-347 only)
 TRIM4CP | Face Plate in Copper for 4" UTP (120-347 only)
 TRIM6BK | Face Plate in Black for 6" UTP
 TRIM6BN | Face Plate in Brushed Nickel for 6" UTP
 TRIM6CP | Face Plate in Copper for 6" UTP

Controls:

- 4" & 6" (120V): Triac (forward phase) dimming; dimming percentage: 10%-100%
- 4" & 6" (120-347V) and 8": 0-10V dimming; dimming percentage: 5%-100%

Cut-Out Dimensions

Model	Cut-Out (Inches)	Cut-Out (mm)
UTP-R4213 UTP-R4233	4 3/8"	112mm
UTP-R4283 UTP-R4486	4 3/8"	110mm
UTP-R6483 UTP-R6586	6 3/8"	161mm
UTP-R8686 UTP-R8714 UTP-R8734	8 1/6"	208mm

