



SSDR Slim Surface Downlight Recessed

FEATURES

- Replaces legacy 4" CFL or incandescent downlights
- Optional color trims can be easily snapped on to customize the look of the fixture
- Provides comfortable diffused light with no dark spots
- FieldCCeT feature allows for multiple "set and forget" CCT options in each fixture

CERTIFICATIONS

- ETL Listed for Wet Locations
- ENERGY STAR® Approved for superior energy efficiency

PERFORMANCE

- Rated lifetime L70: 50,000 hours
- 3000K or FieldCCeT
- CRI: >80 or >90

ELECTRICAL

- Input voltage: 120V
- Dimmable to 10% with compatible Triac dimmers

THERMAL

- -4°F to 104°F (-20°C to 40°C) operating temperature

CONSTRUCTION

- Frosted lens for diffuse lighting

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



FIXTURE



BLACK TRIM



SILVER TRIM



WHITE TRIM

APPLICATIONS

- Residential
- Multi-family
- Hospitality
- Office
- Property management
- Healthcare
- Retail

CONFIGURATOR

MODEL	SIZE	LUMENS	WATTS	CRI/CCT	VOLTAGE	DIMMING	FINISH
SSDR : Slim Surface Downlight Recessed	4 - 4"	70 - 700 lm	9W - 9W	830 - 80 CRI; 3000K	120 - 120V	DT - Triac Dimming	WH - White
		60 - 600 lm		9CCT3 - 90 CRI; 27/30/4000K			

BUILD YOUR PART NUMBER :

SSDR	4		9W		120	DT	WH
------	---	--	----	--	-----	----	----



PERFORMANCE SUMMARY


ORDER CODE	ITEM #	SIZE	WATTS	NOMINAL LUMENS	CCT	CRI	VOLTS	DIMMING	ETL	ENERGY STAR
11280	SSDR4/9W/830/120DT/WH	4"	9W	700	3000K	>80	120V	Triac	Wet	★
11281	SSDR4/9W/9CCT3/120DT/WH	4"	9W	600	27/30/4000K	>90	120V	Triac	Wet	★

ACCESSORIES


ORDER CODE	ITEM #	DESCRIPTION
11282	SSDR4-TRIM-BK*	4" Trim Black
11283	SSDR4-TRIM-SI*	4" Trim Silver
11284	SSDR4RETROACC	4" Retrofit Accessory

**Compatible with 90CRI FieldCCeT fixture only*

PRODUCT DIMENSIONS

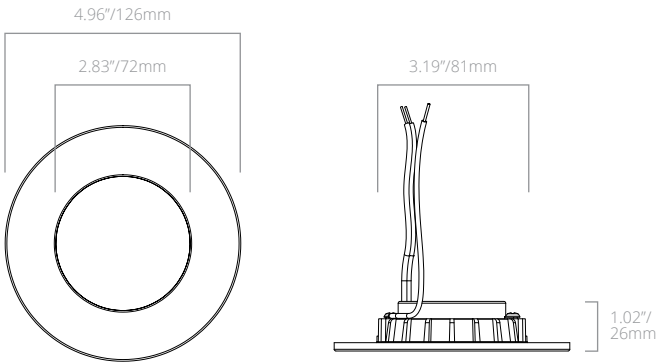

SSDR4 9W

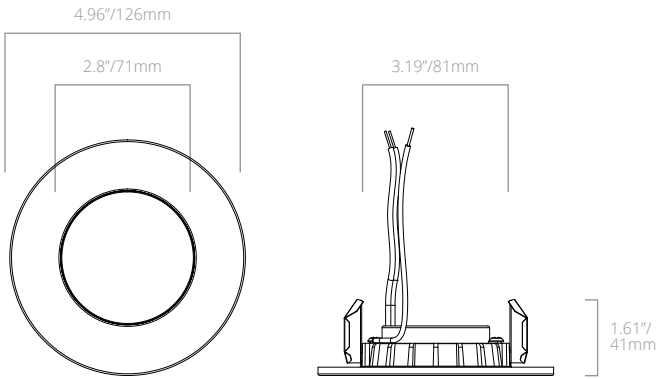


SSDR4 9W W/ RETROFIT ACCESSORY

PHOTOMETRICS

SSDR4/9W/830/120DT/WH


ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30	214.69	27.6%
0-40	352.42	45.3%
0-60	621.95	80.0%
0-80	761.86	98.0%
0-90	774.28	99.6%
60-80	139.91	18.0%
70-80	47.42	6.1%
80-90	12.42	1.6%
0-180	777.57	100%



0° 90°

SSDR4/9W/9CCT3/120DT/WH

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30	179.23	28.9%
0-40	292.58	47.2%
0-60	511.23	82.4%
0-80	613.25	98.9%
0-90	617.78	99.6%
60-80	102.02	16.4%
70-80	30.77	5.0%
80-90	4.53	0.7%
0-180	620.28	100%



0° 90°