

H5LVIC-AT

5" Low Voltage Downlight

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



DESCRIPTION

1. REFLECTOR - 16 gauge aluminum.

2. TRIM - All die-cast aluminum. Can take up to 2 optical accessories.


3. COVER LENS - High temperature tempered glass.

4. SOCKET - Porcelain bi-pin socket.

5. MOUNTING BRACKET - Is constructed from 16-gauge steel and is supplied with C-channels that are adjustable up to 26".

6. JUNCTION BOX - UL listed for through-branch circuit wiring. Junction Box is accessible from below, no tools required.

7. MOUNTING FRAME - IC-Air-Shut fixture may be in direct contact with insulation.

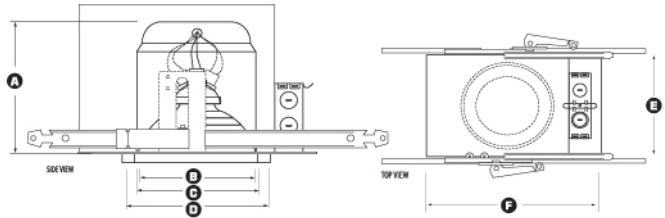

A. Height = 7-1/4"

B. Trim Aperture = 5-13/16"

C. Cut-out = 5-7/8"

D. Trim Outside Diameter = 6-1/2"

E. Width = 7-11/16"

F. Length = 12-1/2"



H5LVIC-AT- ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	TRIM TYPE & DESCRIPTION	BAFFLE	REFLECTOR	TRIM RING
<input type="checkbox"/> 50W MR16	<input type="checkbox"/> (M) Magnetic <input type="checkbox"/> (E) Electronic <input type="checkbox"/> (TOR) Toroidal* <i>*Toroidal = Available only in 120V</i>	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> B1503 <input type="checkbox"/> B1506 <input type="checkbox"/> B1508 <input type="checkbox"/> B1512 <input type="checkbox"/> B1520 <input type="checkbox"/> B1542 <input type="checkbox"/> B1524 <input type="checkbox"/> B1525 <input type="checkbox"/> B1514 <input type="checkbox"/> B1504 <input type="checkbox"/> B1551	<input type="checkbox"/> W <input type="checkbox"/> P <input type="checkbox"/> SN <input type="checkbox"/> CP <input type="checkbox"/> BZ	<input type="checkbox"/> CL <input type="checkbox"/> RG <input type="checkbox"/> W <input type="checkbox"/> MB <input type="checkbox"/> CP <input type="checkbox"/> SN	<input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SN <input type="checkbox"/> CP <input type="checkbox"/> CH <input type="checkbox"/> PB <input type="checkbox"/> BZ

Specifications:

H5LVIC-AT

_____ - _____ - _____ - _____ - _____ - _____
WATT BALLAST VOLTAGE TRIM TYPE REFLECTOR BAFFLE RING

BAFFLE	REFLECTOR	TRIM RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	CP Copper	CH Chrome
	SN Satin Nickel	PB Polish Brass
		BZ Bronze

Sample of Catalog Number: **H5LVIC-AT-50W MR16-120-B1506-WH**

MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

MAX-SPECS 2011-03-08

5" Low Voltage Optics

Catalog Number:


Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

B1503WH
SLOT APERTURE (30° TILT)

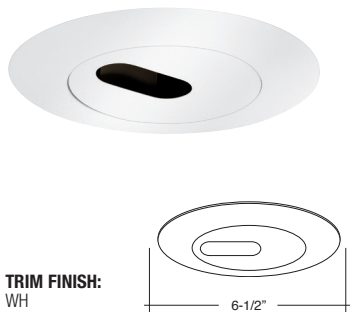


B1506WH
SURFACE FULLY ADJUSTABLE



B1508WH
ADJUSTABLE SPOT




B1512BK
SURFACE ADJUSTABLE

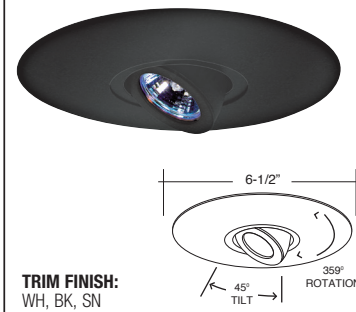


B1520W-WH
SEMI FROSTED SHOWER TRIM (30° TILT)




B1542RG-WH
REFLECTOR

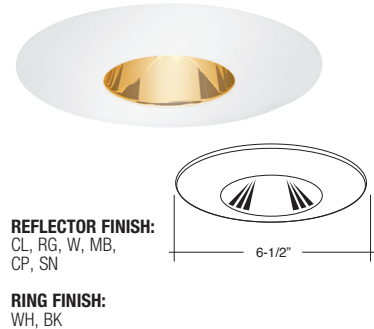


B1524PEACH-WH
METROPOLITAN GLASS

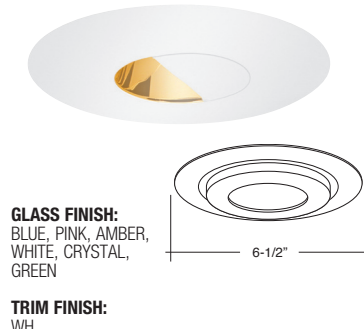


B1525BLUE-WH
METROPOLITAN STEPPED GLASS

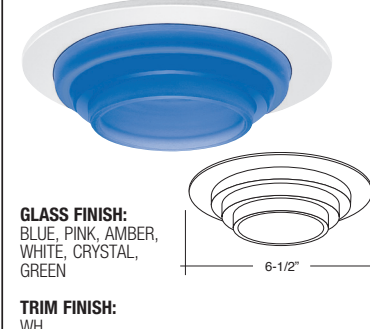


B1514P-WH
PINHOLE BAFFLE

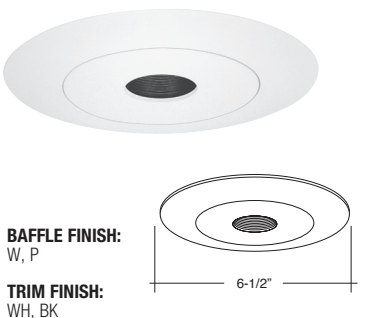

B1504W-WH
ADJUSTABLE EYEBALL

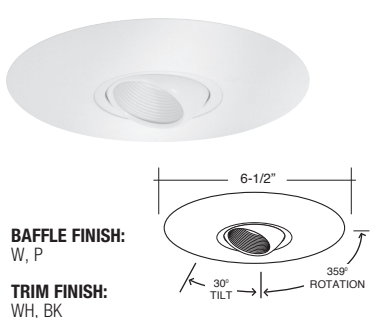

B1551P-WH
STEPPED BAFFLE

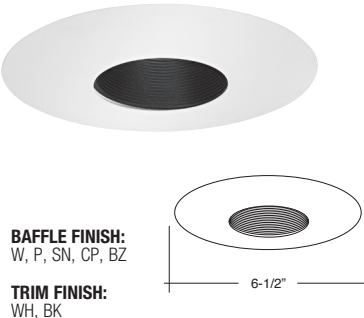

BAFFLE	REFLECTOR	TRIM RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	CP Copper	CH Chrome
	SN Satin Nickel	PB Polish Brass
		BZ Bronze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-23-2011