

B6-GU24-IC

6" Compact Fluorescent GU24 IC Housing

LAMP WATTAGE: (1) MAXIMUM 26W GU24

Catalog Number:

Project Name:

Type:

Note:



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

DESCRIPTION

For new construction. Thermally protected, IC rated specification grade recessed housing. Accommodates up to 26W GU24 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

SPECIFICATION

A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

B. SOCKET - GU24 BASE is screwed to the top of housing but can be removed to snap into socket supporting trims.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

D. JUNCTION BOX - UL listed for through-branch circuit wiring, provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, over-lamping and misuse of insulation material.

120V



GU24 SOCKET

FEATURES

- Thermally Protected IC housing.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 7-1/4" height allows use in 2" x 8" joist construction.
- Special screw on the frame locks bar hangers in place which prevents the housing from any movement once installed.


OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.
- Lamp must be ordered separately (please consult factory)

UL AND C-UL LISTED

- For Damp location
- For Feed-through wiring
- For Direct contact with insulation

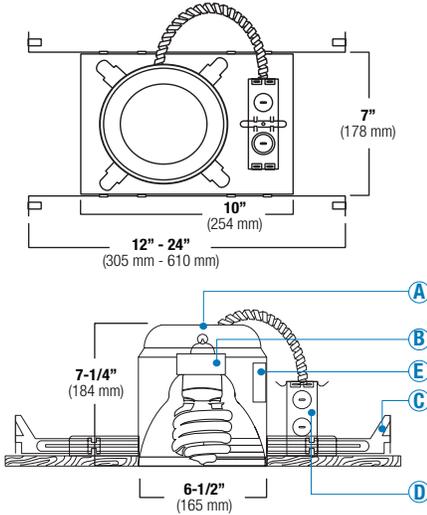

B6-GU24-IC - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	VOLTAGE	AIR-SHUT	OTHER OPTION	TRIM TYPE				BAFFLE	REFLECTOR	TRIM/RING	GLASS
Maximum lamp wattage 26W, see specific trims for details	<input type="checkbox"/> 120	<input type="checkbox"/> AT	<input type="checkbox"/> W - With Quick Connector	<input type="checkbox"/> B725	<input type="checkbox"/> B753	<input type="checkbox"/> B742	<input type="checkbox"/> B780	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> Green
				<input type="checkbox"/> B731	<input type="checkbox"/> B754	<input type="checkbox"/> B737	<input type="checkbox"/> B789	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> Yellow
				<input type="checkbox"/> B722	<input type="checkbox"/> B705	<input type="checkbox"/> B755		<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> Pink
				<input type="checkbox"/> AF724	<input type="checkbox"/> B705L	<input type="checkbox"/> B735		<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> Brown
				<input type="checkbox"/> B721	<input type="checkbox"/> B706	<input type="checkbox"/> B736		<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> Navy Blue
				<input type="checkbox"/> B729	<input type="checkbox"/> B706L	<input type="checkbox"/> B781			<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Orange
				<input type="checkbox"/> B620	<input type="checkbox"/> B707	<input type="checkbox"/> B787			<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> Blue
				<input type="checkbox"/> B723	<input type="checkbox"/> B707L	<input type="checkbox"/> B782			<input type="checkbox"/> SHZ		<input type="checkbox"/> White
				<input type="checkbox"/> B724	<input type="checkbox"/> B743	<input type="checkbox"/> B788					<input type="checkbox"/> Red
				<input type="checkbox"/> B751	<input type="checkbox"/> B756	<input type="checkbox"/> B785					
				<input type="checkbox"/> B752	<input type="checkbox"/> B741	<input type="checkbox"/> B796					

Specifications:

B6-GU24-IC

VOLTAGE - AIR-SHUT - OPTIONS - TRIM TYPE - REFLECTOR - BAFFLE - RING - GLASS

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	BZ Black	CP Copper
BZ Bronze	MB Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

Sample of Catalog Number: B6-GU24-IC-AT-W-B731W-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

6" CFL Trims

(LAMP WATTAGE: UP TO 26W GU24)

Catalog Number:

Project Name:

Type:

Note:



B725W-WH
BAFFLE WITH FROSTED DOME

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, P-BK

B731W-WH
FULL CONE BAFFLE

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, SN-SN, CP-CP, BZ-BZ

B722W-CL-WH
CONE REFLECTOR BAFFLE

AVAILABLE COLOR COMBINATIONS:
W-CL-WH, P-CL-WH, W-W-WH

AF724W-WH
DEEP SELF FLANGE AIR-SHUT BAFFLE

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, SN-SN, CP-CP, BZ-BZ

B721CL-WH
CONE REFLECTOR

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN

B729W-WH
BAFFLE WALL WASH

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, SN-SN, CP-CP, BZ-BZ

COVER FINISH:
WH, BK

B620-NAVY BLUE
GLASS TRIM

GLASS FINISH:
GREEN, YELLOW, PINK, BROWN, NAVY BLUE, ORANGE, WHITE, RED

B723MB-WH
WALL WASH REFLECTOR

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, RG-WH, RG-PB, W-WH, MB-WH, CP-CP, SN-SN

COVER FINISH:
WH, BK

B724W-CL-WH
REFLECTOR BAFFLE WALL WASH

AVAILABLE COLOR COMBINATIONS:
W-CL-WH, P-CL-WH, W-W-WH

COVER FINISH:
WH, BK

B751WH
SMOOTH FROST DOME SHOWER LENS

LENS:
FROSTED

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

B752WH
DESIGNER POINT SHOWER LENS

LENS:
FROSTED/CLEAR

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

B753WH
DESIGNER CONE SHOWER LENS

LENS:
FROSTED

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

B754WH
SMOOTH FROST SHOWER LENS

LENS:
FROSTED

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

B705CP
METAL ALBALITE LENS

LENS:
ALBALITE

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

B705L
PLASTIC ALBALITE LENS

LENS:
ALBALITE

TRIM/RING FINISH:
WHITE PLASTIC

B706PB
METAL FRESNEL LENS

LENS:
FRESNEL

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

6" CFL Trims

(LAMP WATTAGE: UP TO 26W GU24)

Catalog Number:

Project Name:

Type:

Note:



B706L
PLASTIC FRESNEL LENS

LENS:
FRESNEL

TRIM/RING FINISH:
WHITE PLASTIC

8"

B707CP
METAL DROP OPAL LENS

LENS:
DROP OPAL

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

8"

B707L
PLASTIC DROP OPAL LENS

LENS:
DROP OPAL

TRIM/RING FINISH:
WHITE PLASTIC

8"

B743RG-WH
REFLECTOR W/ DROP OPAL LENS

REFLECTOR FINISH:
CL, RG, W, MB, CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B756CL-WH
REFLECTOR W/ PRISMATIC LENS

REFLECTOR FINISH:
CL, RG, W, MB, CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B741RG-WH
REFLECTOR W/ ALBALITE LENS

REFLECTOR FINISH:
CL, RG, W, MB, CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B742CL-WH
REFLECTOR W/ FRESNEL LENS

REFLECTOR FINISH:
CL, RG, W, MB, CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B737W-WH
BAFFLE W/ DROP OPAL LENS

BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B755W-WH
BAFFLE W/ PRISMATIC LENS

BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B735P-WH
BAFFLE W/ ALBALITE LENS

BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B736W-WH
BAFFLE W/ FRESNEL LENS

BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ

7-1/4"

B781CP-WH
SQUARE BAFFLE TRIM

BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP

7-1/2"

B787CP-WH
SQUARE REFLECTOR TRIM

REFLECTOR FINISH:
CL, RG, W, MB, SN, CP

TRIM/RING FINISH:
WH, BK, SN, CP

7-1/2"

B782CL-W-WH
SQUARE REFLECTOR/BAFFLE TRIM

REFLECTOR FINISH:
CL

BAFFLE FINISH:
W, P

TRIM/RING FINISH:
WH, BK, SN, CP

7-1/2"

B788WH
SQUARE ALBALITE SHOWER LENS

LENS:
WHITE

TRIM/RING FINISH:
WH

7-1/2"

B785WH
SQUARE FRESNEL LENS

LENS:
FROSTED

TRIM/RING FINISH:
WH

7-1/2"

6" CFL Trims

(LAMP WATTAGE: UP TO 26W GU24)

Catalog Number:

Project Name:

Type:

Note:




B796WH
SQUARE SMOOTH FROST DOME LENS



FOR WET LOCATION

LENS:
FROSTED

TRIM/RING FINISH:
WH




B780WH
SQUARE DESIGNER POINT LENS



FOR WET LOCATION

LENS:
FROSTED/CLEAR

TRIM/RING FINISH:
WH




B789WH
SQUARE DESIGNER CONE LENS



FOR WET LOCATION

LENS:
FROSTED

TRIM/RING FINISH:
WH



BAFFLE	REFLECTOR	TRIM RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	CP Copper	CH Chrome
	SN Satin Nickel	PB Polish Brass
		BZ Bronze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.