

# B6PL

## 6" Compact Fluorescent Non-IC Housing

LAMP WATTAGE: UP TO 42W

Catalog Number:


Project Name:

Type:

Note:



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

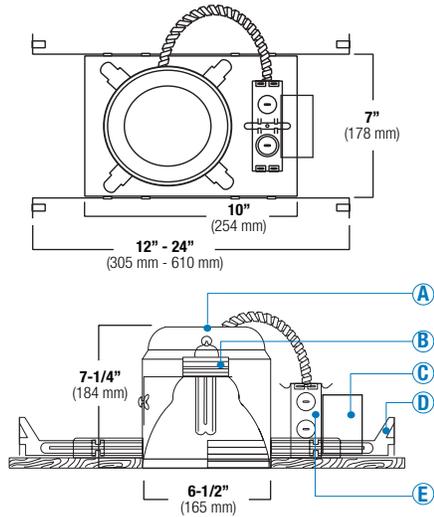

### DESCRIPTION

Thermally protected, specification grade compact fluorescent housing. For new construction non-insulated ceilings or where insulation can be kept 3" from housing. Accommodates (1) compact fluorescent lamp. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

### SPECIFICATION


**A. HOUSING** - High temperature painted 22 gauge cold rolled steel construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

**B. SOCKET** - One vertically mounted plug-in socket. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

**C. BALLAST** - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Advance.

**D. BAR HANGERS** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

**E. JUNCTION BOX** - Listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

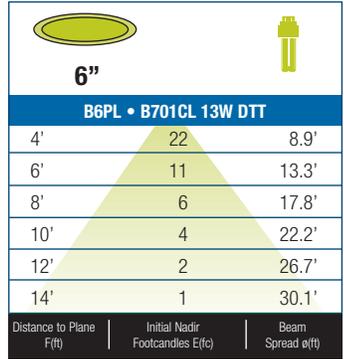

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

### FEATURES

- Integral fluorescent ballast.
- Thermally Protected Non-IC housing.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 7-1/4" height allows use in 2" x 8" joist construction.
- Special screw on the frame locks bar hangers in place which prevents housing from any movement once installed.

### OPTIONS

#### AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.



**B6PL - ITEM SELECTOR:** (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE	BAFFLE	REFLECTOR	TRIM/RING	GLASS
<input type="checkbox"/> 9W	<input type="checkbox"/> (E) Electronic	<input type="checkbox"/> MVOLT (120/277)	<input type="checkbox"/> EMG 750 (750 Lumens) <sup>6</sup>	<input type="checkbox"/> B725 <input type="checkbox"/> B751 <input type="checkbox"/> B756 <input type="checkbox"/> B785	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> Green
<input type="checkbox"/> 13W	<input type="checkbox"/> (M) Magnetic <sup>1</sup>	<input type="checkbox"/> 120	<input type="checkbox"/> EMG 1300 (1300 Lumens) <sup>6</sup>	<input type="checkbox"/> B731 <input type="checkbox"/> B752 <input type="checkbox"/> B741 <input type="checkbox"/> B796	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> Yellow
<input type="checkbox"/> 18W	<input type="checkbox"/> (S) Energy Star <sup>2</sup>	<input type="checkbox"/> 277	<input type="checkbox"/> EMG-D-750 (750 Lumens) <sup>7</sup>	<input type="checkbox"/> B722 <input type="checkbox"/> B753 <input type="checkbox"/> B742 <input type="checkbox"/> B780	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> Pink
<input type="checkbox"/> 26W		<input type="checkbox"/> 347	<input type="checkbox"/> ICE-1300 (1300 Lumens) <sup>8</sup>	<input type="checkbox"/> AF640 <input type="checkbox"/> B754 <input type="checkbox"/> B737 <input type="checkbox"/> B789	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> Brown
<input type="checkbox"/> 32W				<input type="checkbox"/> B721 <input type="checkbox"/> B705 <input type="checkbox"/> B755	<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> Navy Blue
<input type="checkbox"/> 42W				<input type="checkbox"/> AF632 <input type="checkbox"/> B705L <input type="checkbox"/> B735		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Orange
<input type="checkbox"/> 26W/32W/42W	<b>DIMMING</b>	<b>AIR-SHUT</b>	<b>OTHER OPTIONS</b>	<input type="checkbox"/> B702 <input type="checkbox"/> B706 <input type="checkbox"/> B736		<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> Blue
	<input type="checkbox"/> Mark 7 <sup>3</sup>	<input type="checkbox"/> AT	<input type="checkbox"/> FUSE <sup>9</sup>	<input type="checkbox"/> B729 <input type="checkbox"/> B706L <input type="checkbox"/> B781		<input type="checkbox"/> SHZ		<input type="checkbox"/> White
	<input type="checkbox"/> Mark 10 <sup>4</sup>		<input type="checkbox"/> RIF <sup>10</sup>	<input type="checkbox"/> B620 <input type="checkbox"/> B707 <input type="checkbox"/> B787				<input type="checkbox"/> Red
	<input type="checkbox"/> Lut-E (EC3D) <sup>5</sup>			<input type="checkbox"/> B723 <input type="checkbox"/> B707L <input type="checkbox"/> B782				
	<input type="checkbox"/> REB-DIM-120			<input type="checkbox"/> B724 <input type="checkbox"/> B743 <input type="checkbox"/> B788				

<sup>1</sup> - (M) Magnetic = Available only in 9W fixture and not available in MVOLT • <sup>2</sup> - (S) Energy Star = Available on selected fixtures only, please see list above • <sup>3</sup> - MARK 7 = Not available in 9W, 13W, 57W, 70W • <sup>4</sup> - MARK 10 = Not available in 9W, 13W, 57W, 70W, must specify voltage • <sup>5</sup> - LUT-E (EC3D) = Not available in 9W, 13W, 57W, 70W • <sup>6</sup> - EMG = Emergency battery pack w/ remote test switch • <sup>7</sup> - EMG-D = Emergency battery pack w/ remote test switch for damp location • <sup>8</sup> - ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • <sup>9</sup> - FUSE = Single slow-blow fuse • <sup>10</sup> - RIF = Radio interference filter

### Specifications:

#### B6PL

WATT BALLAST VOLTAGE AIR-SHUT EMERGENCY OPTIONS TRIM TYPE REFLECTOR BAFFLE RING GLASS

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	BZ Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

Sample of Catalog Number: B6PL-26W-E-MVOLT-EMG750-B731W-WH

\*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ [www.iuseelite.com](http://www.iuseelite.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

# 6" CFL Trims

( LAMP WATTAGE: UP TO 42W )















Catalog Number:

Project Name:

Type:

Note:



<p><b>B725W-WH</b> BAFFLE WITH FROSTED DOME</p>  <p>FOR WET LOCATION</p> <p>AVAILABLE COLOR COMBINATIONS: CP-CP, SN-SN, W-WH, P-WH, P-BK</p>  <p>7-1/4"</p>	<p><b>B731W-WH</b> FULL CONE BAFFLE</p>  <p>AVAILABLE COLOR COMBINATIONS: W-WH, P-WH, SN-SN, CP-CP, BZ-BZ</p>  <p>7-1/4"</p>	<p><b>B722W-CL-WH</b> CONE REFLECTOR BAFFLE</p>  <p>AVAILABLE COLOR COMBINATIONS: W-CL-WH, P-CL-WH, W-W-WH</p>  <p>7-1/4"</p>	<p><b>AF640W-WH</b> DEEP SELF FLANGE AIR-SHUT BAFFLE</p>  <p>NEW CLIP DESIGN</p> <p>AVAILABLE COLOR COMBINATIONS: W-WH, P-WH, SN-SN, CP-CP, BZ-BZ</p>  <p>7-1/4"</p>
<p><b>B721CL-WH</b> CONE REFLECTOR</p>  <p>AVAILABLE COLOR COMBINATIONS: CL-WH, CL-CH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN</p>  <p>7-1/4"</p>	<p><b>AF632RG-WH</b> AIR-SHUT REFLECTOR</p>  <p>NEW CLIP DESIGN</p> <p>AVAILABLE COLOR COMBINATIONS: CL-WH, CL-CH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN</p>  <p>7-1/4"</p>	<p><b>B702P-RG-WH</b> CONE REFLECTOR/BAFFLE TRIM</p>  <p>BAFFLE FINISH: W, P</p> <p>REFLECTOR FINISH: CL, RG</p> <p>TRIM/RING FINISH: WH, BK, SN, CP, CH, PB, BZ</p>  <p>7-1/4"</p>	<p><b>B729W-WH</b> BAFFLE WALL WASH</p>  <p>AVAILABLE COLOR COMBINATIONS: W-WH, P-WH, SN-SN, CP-CP, BZ-BZ</p> <p>COVER FINISH: WH, BK</p>  <p>7-1/4"</p>
<p><b>B620-NAVY BLUE</b> GLASS TRIM</p>  <p>GLASS FINISH: GREEN, YELLOW, PINK, BROWN, NAVY BLUE, ORANGE, WHITE, RED</p>  <p>7-1/4"</p>	<p><b>B723MB-WH</b> WALL WASH REFLECTOR</p>  <p>AVAILABLE COLOR COMBINATIONS: CL-WH, CL-CH, RG-WH, RG-PB, W-WH, MB-WH, CP-CP, SN-SN</p> <p>COVER FINISH: WH, BK</p>  <p>7-1/4"</p>	<p><b>B724W-CL-WH</b> REFLECTOR BAFFLE WALL WASH</p>  <p>AVAILABLE COLOR COMBINATIONS: W-CL-WH, P-CL-WH, W-W-WH</p> <p>COVER FINISH: WH, BK</p>  <p>7-1/4"</p>	<p><b>B751WH</b> SMOOTH FROST DOME SHOWER LENS</p>  <p>FOR WET LOCATION</p> <p>LENS: FROSTED</p> <p>TRIM/RING FINISH: WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>
<p><b>B752WH</b> DESIGNER POINT SHOWER LENS</p>  <p>FOR WET LOCATION</p> <p>LENS: FROSTED/CLEAR</p> <p>TRIM/RING FINISH: WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B753WH</b> DESIGNER CONE SHOWER LENS</p>  <p>FOR WET LOCATION</p> <p>LENS: FROSTED</p> <p>TRIM/RING FINISH: WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B754WH</b> SMOOTH FROST SHOWER LENS</p>  <p>FOR WET LOCATION</p> <p>LENS: FROSTED</p> <p>TRIM/RING FINISH: WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B705CP</b> METAL ALBALITE LENS</p>  <p>FOR WET LOCATION</p> <p>LENS: ALBALITE</p> <p>TRIM/RING FINISH: WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>

# 6" CFL Trims

( LAMP WATTAGE: UP TO 42W )

Catalog Number:

Project Name:

Type:

Note:



**B705L**  
PLASTIC ALBALITE LENS



LENS:  
ALBALITE

TRIM/RING FINISH:  
WHITE PLASTIC



**B706PB**  
METAL FRESNEL LENS



LENS:  
FRESNEL

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B706L**  
PLASTIC FRESNEL LENS



LENS:  
FRESNEL

TRIM/RING FINISH:  
WHITE PLASTIC




**B707CP**  
METAL DROP OPAL LENS



LENS:  
DROP OPAL

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B707L**  
PLASTIC DROP OPAL LENS



LENS:  
DROP OPAL

TRIM/RING FINISH:  
WHITE PLASTIC



**B743RG-WH**  
REFLECTOR W/ DROP OPAL LENS



REFLECTOR FINISH:  
CL, RG, W, MB,  
CP, SN

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




**B756CL-WH**  
REFLECTOR W/ PRISMATIC LENS



REFLECTOR FINISH:  
CL, RG, W, MB,  
CP, SN

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B741RG-WH**  
REFLECTOR W/ ALBALITE LENS



REFLECTOR FINISH:  
CL, RG, W, MB,  
CP, SN

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B742CL-WH**  
REFLECTOR W/ FRESNEL LENS



REFLECTOR FINISH:  
CL, RG, W, MB,  
CP, SN

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B737W-WH**  
BAFFLE W/ DROP OPAL LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




**B755W-WH**  
BAFFLE W/ PRISMATIC LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B735P-WH**  
BAFFLE W/ ALBALITE LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



**B736W-WH**  
BAFFLE W/ FRESNEL LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




**B781CP-WH**  
SQUARE BAFFLE TRIM



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP




**B787CP-WH**  
SQUARE REFLECTOR TRIM



REFLECTOR FINISH:  
CL, RG, W, MB,  
SN, CP

TRIM/RING FINISH:  
WH, BK, SN, CP




**B782CL-W-WH**  
SQUARE REFLECTOR/BAFFLE TRIM



REFLECTOR FINISH:  
CL

BAFFLE FINISH:  
W, P

TRIM/RING FINISH:  
WH, BK, SN, CP



# 6" CFL Trims

( LAMP WATTAGE: UP TO 42W )

Catalog Number:

Project Name:

Type:

Note:




## B788WH SQUARE ALBALITE SHOWER LENS



LENS:  
WHITE

TRIM/RING FINISH:  
WH




## B785WH SQUARE FRESNEL LENS



LENS:  
FROSTED

TRIM/RING FINISH:  
WH




## B796WH SQUARE SMOOTH FROST DOME LENS



LENS:  
FROSTED

TRIM/RING FINISH:  
WH




## B780WH SQUARE DESIGNER POINT LENS



LENS:  
FROSTED/CLEAR

TRIM/RING FINISH:  
WH




## B789WH SQUARE DESIGNER CONE LENS



LENS:  
FROSTED

TRIM/RING FINISH:  
WH



BAFFLE	REFLECTOR	TRIM RING
<b>W</b> White	<b>CL</b> Chrome	<b>WH</b> White
<b>P</b> Black	<b>RG</b> Gold	<b>BK</b> Black
<b>SN</b> Satin Nickel	<b>W</b> White	<b>SN</b> Satin Nickel
<b>CP</b> Copper	<b>MB</b> Black	<b>CP</b> Copper
<b>BZ</b> Bronze	<b>CP</b> Copper	<b>CH</b> Chrome
	<b>SN</b> Satin Nickel	<b>PB</b> Polish Brass
		<b>BZ</b> Bronze

\*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.