

6" COMPACT FLUORESCENT IC SERIES HOUSING

B6PLIC


6" CFL IC HOUSING



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

DESCRIPTION

Thermally protected, specification grade compact fluorescent IC housing. For new construction where housing will be in direct contact with insulation. Available in (1) 4-pin Compact fluorescent lamp.

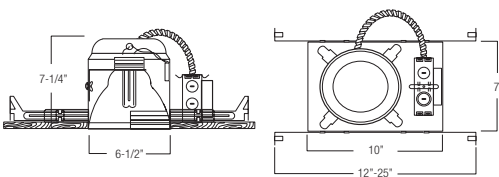

LAMP BASE GUIDE (Sockets will accept all designated lamp bases listed.)				
13W	18W	26W	32W	
G24q-1 GX24q-1	G24q-2 GX24q-2	G24q-3 GX24q-3	GX24q-4	GX24q-3 GX24q-4

SPECIFICATION

HOUSING - Die formed aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceilings.

SOCKET - One vertically mounted plug-in socket. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

BALLAST - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Philips Advance.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward

angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - UL listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

OPTION

1. AIR-SHUT-

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

WATTAGE	BALLAST	DIMMING	VOLTAGE	AIR-SHUT	EMERGENCY OPTIONS	OPTIONS
☐ 13W ☐ 18W ☐ 26W	☐ E-Electronic ☐ M-Magnetic (13W Max)	☐ Mark 7 ☐ Mark 10 ☐ Lut-E (EC3D) ☐ REB-DIM120	☐ 120 (Energy Star) ☐ 277	☐ AT Air-Shut	☐ EMG 750 (750 lm) ☐ EMG 1300 (1300 lm) ☐ EMG D-750 (750 lm) ☐ ICE 1300 (1300 lm)	☐ FUSE ☐ RIF

B6PLIC-26/32-E


6" DOUBLE WALL CFL IC HOUSING



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

DESCRIPTION

Thermally protected, specification grade compact fluorescent IC housing. For new construction where housing will be in direct contact with insulation. Available in (1) 26W or 32W 4-pin compact fluorescent lamp.

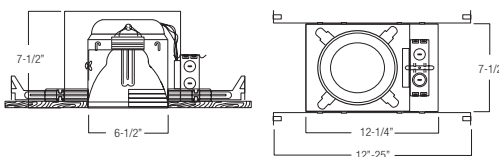

SPECIFICATION

OUTER HOUSING - Die formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.

INNER HOUSING - Die-formed, all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

SOCKET - One vertically mounted plug-in socket. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

BALLAST - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Philips Advance.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-

headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.


JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

OPTION

1. AIR-SHUT-

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

WATTAGE	BALLAST	DIMMING	VOLTAGE	AIR-SHUT	EMERGENCY OPTIONS	OPTIONS
☐ 26W/32W ☐ 32W	☐ E-Electronic	☐ Mark 7 ☐ Mark 10 ☐ Lut-E (EC3D) ☐ REB-DIM120	☐ 120 (Energy Star) ☐ 277	☐ AT Air-Shut	☐ EMG 750 (750 lm) ☐ EMG 1300 (1300 lm) ☐ EMG D-750 (750 lm) ☐ ICE 1300 (1300 lm)	☐ FUSE ☐ RIF



B26-GU24-RIC
6" SHALLOW GU24 IC REMODEL HOUSING



DESIGNED FOR 2" X 6" JOIST CONSTRUCTION

B26-GU24-IC

6" SHALLOW GU24 IC HOUSING



DESIGNED FOR 2" X 6" JOIST CONSTRUCTION



B620 - GREEN



B620 - YELLOW



B620 - PINK



B620 - BROWN



B620 - NAVY BLUE



B620 - ORANGE



B620 - BLUE



B620 - WHITE



B620 - RED

Elite Lighting now offers a new line of exotic glass trims. The new series of glass trims can elegantly complement any color scheme in any environment. We are certain that with such a wide selection, you will find the perfect colored trim for your project.

PATENT #: D562,490

B620 - Glass Trim



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13W TTT/13W, 18W, 26W TTT
B6PLC-26/32-E	26W TTT
B6PL, B6PLR	13W, 18W, 26W
B62PLC, B62PLRIC, B62PL(R)	2x13W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24
B26-GU24-IC, B26-GU24-RIC	13W, 15W, 18W GU24

AVAILABLE EXOTIC GLASS COLORS:

GREEN, YELLOW, PINK, BROWN, NAVY BLUE, ORANGE, BLUE, WHITE, RED


B725W-WH

Baffle w/ Frosted Dome



BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP, CH, PB, BZ



HOUSING	MAX. LAMP WATTAGE
B6PLC(IC), B6PLR(IC)	18W TTT, 26W TTT
B6PLC-26/32-E	26W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

PATENT #: 7,597,460 / D571,036

B731W-WH

Full Cone Matte Finish Baffle



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, BZ-BZ



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC, B6PLC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24


PATENT #: 7,597,460 / D551,797

B722W-CL-WH

Cone Reflector/Baffle



AVAILABLE COLOR COMBINATIONS:
W-CL-WH, P-CL-WH, W-W-WH



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC, B6PLC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

AF724W-WH

Deep Self Flange Air-Shut Glossy Finish Baffle



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, BZ-BZ




HOUSING	MAX. LAMP WATTAGE
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

AF640W-WH

Deep Self Flange Air-Shut Matte Finish Baffle



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, BZ-BZ




HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13W, 18W TTT, 26W TTT
B6PLC-26/32-E	26W TTT
B6PL, B6PLR	13W, 18W TTT, 26W TTT

B721CL-WH

Cone Reflector



AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC, B6PLC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24


PATENT #: 7,597,460 / D546,999

AF632RG-WH

Air-Shut Reflector



AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN




HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13W, 18W TTT, 26W TTT
B6PLC-26/32-E	26W TTT
B6PL, B6PLR	13W, 18W TTT, 26W TTT

B701CP-WH

Cone Reflector



AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, SHZ-WH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1x13W TTT/13W TTT
B6PL, B6PLR	1x13W TTT/13W TTT
B62PLC, B62PLRIC	2x13W TTT
B62PL, B62PLR	2x13W TTT

BAFFLE FINISH:

W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:

CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:

WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze



6" COMPACT FLUORESCENT TRIMS

THE ART OF LIGHTING REFLECTORS




Elite Lighting reflectors have been engineered to deliver optimum performance, regardless of the type of light source being used.

B617RG-WH Shallow Cone Reflector



REFLECTOR:
CL, RG, W, MB

TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING	MAX. LAMP WATTAGE
B26PLIC-E	1 LAMP 13W TTT

B723MB-WH Wall Wash Reflector



AVAILABLE COLOR COMBINATIONS:
CP-CP, W-WH, RG-WH,
MB-WH, CL-WH,
MB-BK, RG-PB, CL-CH




HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC, B6PLIC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

B703RG-WH Wall Wash Reflector



REFLECTOR:
CL, RG, W, MB, CP, SN

COVER:
WH, BK



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W TTT
B6PL, B6PLR	1X13WTT/13W TTT
B62PLIC, B62PLRIC	2X13WTT
B62PL, B62PLR	2X13WTT


B702P-RG-WH Cone Reflector/Baffle



BAFFLE: W, P

REFLECTOR: CL, RG

TRIM:
WH, BK, SN, CP, CH, PB, BZ



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W TTT
B6PL, B6PLR	1X13WTT/13W TTT
B62PLIC, B62PLRIC	2X13WTT
B62PL, B62PLR	2X13WTT

B724W-CL-WH Reflector Baffle Wall Wash



AVAILABLE COLOR COMBINATIONS:
W-CL-WH, P-CL-WH,
W-W-WH
COVER:
WH, BK



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC, B6PLIC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

B704P-CL Reflector Baffle Wall Wash



BAFFLE: W, P

REFLECTOR: CL, RG

COVER:
WH, BK



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W TTT
B6PL, B6PLR	1X13WTT/13W TTT
B62PLIC, B62PLRIC	2X13WTT
B62PL, B62PLR	2X13WTT

B729W-WH Baffle Wall Wash



AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH,
P-WH, BZ-BZ
COVER:
WH, BK



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	18W, 26W, 32W, 42W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

Aqua SERIES

Elite Lighting's Aqua Series is specifically designed for showers and wet locations. These fixtures represent products that the market has demanded for a very long time. With its fully silicon glass and gasketed ring, the consumer is assured that no harm will be done to the housing and electrical systems.



B706CH Metal Fresnel Lens



LENS:
FRESNEL

TRIM:
WH, BK, SN, CP, CH,
PB, BZ



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B706L Plastic Fresnel Lens



LENS:
FRESNEL

TRIM:
L (WHITE PLASTIC TRIM RING)




HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B705CP Metal Albalite Lens



LENS:
ALBALITE

TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B705L Plastic Albalite Lens



LENS:
ALBALITE

TRIM:
L (WHITE PLASTIC TRIM RING)




HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B707CP Metal Drop Opal Lens



LENS:
DROP OPAL

TRIM:
WH, BK, SN, CP, CH,
PB, BZ




HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B707L Plastic Drop Opal Lens



LENS:
DROP OPAL

TRIM:
L (WHITE PLASTIC TRIM RING)



HOUSING	MAX. LAMP WATTAGE
B6PLIC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

BAFFLE FINISH:

W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:

CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:

WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze



General Lighting



Wall Wash Lighting



Accent Lighting



Sloped Ceiling Lighting



Task Lighting

B751WH


Smooth Frost Dome Shower Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	14W, 19W, 26W GU24

B752WH


Designer Point Shower Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	14W, 19W, 26W GU24

B753WH


Designer Cone Shower Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	14W, 19W, 26W GU24

B754WH

Smooth Frost Shower Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	14W, 19W, 26W GU24

B743RG-WH

Reflector w/ Drop Opal Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B756CL-WH


Reflector with Prismatic Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B741RG-WH

Reflector with Albalite Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B742CL-WH

Reflector with Fresnel Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B737W-WH


Baffle with Drop Opal Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B755W-WH


Baffle with Prismatic Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B735P-WH

Baffle with Albalite Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B736W-WH

Baffle with Fresnel Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	13WTT/13W, 18W, 26WTTT
B6PL, B6PLR	13WTT/13W, 18W, 26WTTT
B62PLIC, B62PLRIC, B62PL(R)	2x13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B757W-WH

Baffle w/ Frosted Dome Shower Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1x13WTT/13W, 18W, 26W
B6PL, B6PLR	1x13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC	2x13WTT
B62PL, B62PLR	2x13WTT

B758CL-WH

Reflec. w/ Frosted Dome Shower Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1x13WTT/13W, 18W, 26W
B6PL, B6PLR	1x13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC	2x13WTT
B62PL, B62PLR	2x13WTT

B760W-WH

Baffle w/ Frosted Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1x13WTT/13W, 18W, 26W
B6PL, B6PLR	1x13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC	2x13WTT
B62PL, B62PLR	2x13WTT

B759CL-WH

Reflector w/ Frosted Lens



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1x13WTT/13W, 18W, 26W
B6PL, B6PLR	1x13WTT/13W, 18W, 26W
B62PLIC, B62PLRIC	2x13WTT
B62PL, B62PLR	2x13WTT

BAFFLE FINISH:

W	White
P	Black
SN	Satin Nickel
CP	Copper
BZ	Bronze

REFLECTOR FINISH:

CL	Chrome
RG	Gold
W	White
MB	Black

BZ	Bronze
CP	Copper
SN	Satin Nickel
SHZ	Satin Haze

RING/TRIM FINISH:

WH	White
BK	Black
SN	Satin Nickel
CP	Copper

CH	Chrome
PB	Polish Brass
BZ	Bronze

General Lighting



Accent Lighting



Task Lighting



SQUARE

SQUARE TRIMS


B781CP-WH
Square Baffle Trim



BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP

PATENT #: D510,151



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC, B6PLC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24


B787CP-WH
Square Reflector Trim



REFLECTOR:
CL, RG, W, MB, SN, CP

TRIM:
WH, BK, SN, CP

PATENT #: D510,151



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC, B6PLC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

B782CL-WH
Square Reflector/Baffle Trim




REFLECTOR: CL

BAFFLE: W, P

TRIM: WH, BK, SN, CP

PATENT #: D510,151



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC, B6PLC-32	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24


B788WH
Square Albalite Shower Trim



LENS:
WHITE

TRIM:
WH

PATENT #: D510,151



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	18W TTT, 26W TTT, 32W TTT
B6PL, B6PLR	18W, 26W, 32W, 42W TTT
B62PLC, B62PLRIC, B62PL(R)	1X13WTT/13W, 18W, 26W
B6-GU24-IC, B6-GU24-RIC	13W, 15W, 18W GU24

B785WH
Square Fresnel Lens



LENS:
FROSTED

TRIM:
WH

PATENT #: D510,151



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24


B796WH
Square Smooth Frost Dome Lens



LENS:
FROSTED

TRIM:
WH

PATENT #: D510,151



HOUSING	MAX. LAMP WATTAGE
B6PLC, B6PLRIC	1X13WTT/13W, 18W, 26W
B6PL, B6PLR	1X13WTT/13W, 18W, 26W
B62PLC, B62PLRIC, B62PL(R)	2X13WTT
B6-GU24-IC, B6-GU24-RIC	13W, 15W GU24

B607CP-WH
Reflector



REFLECTOR:
CL, RG, W, MB, BZ,
CP, SN, SHZ

TRIM:
WH, BK, SN, CP, CH, PB, BZ


HOUSING	MAX. LAMP WATTAGE
B26-GU24-IC, B26-GU24-RIC	13W GU24

B630CP-CP Metal Stepped Matte Finish Baffle



BAFFLE:
W, P, SN, CP, BZ

TRIM:
WH, BK, SN, CP,
CH, PB, BZ



HOUSING	MAX. LAMP WATTAGE
B26-GU24-IC, B26-GU24-RIC	13W GU24

6 INCH COMPACT FLUORESCENT TRIMS



6" INCANDESCENT HOUSING



CFL RETROFIT KIT

- Fits most 6" standard housings.
- Available in hardwire or medium screw base.
- UL classified component



CFL RETROFIT KIT



Elite Lighting Compact Fluorescent Retrofit Kits allow conversion of existing incandescent fixtures to energy efficient compact fluorescent lamps.

ITEM NO.	WATTS	VOLTS/PF	BALLAST
BPL-13	1/13W	120V/NPF	MAGNETIC
BPL-213	2/13W	120V/NPF	MAGNETIC
BPL-13E	1/13W	120V/HPF	ELECTRONIC
BPL-18E	1/18W	120V/HPF	ELECTRONIC
BPL-26E	1/26W	120V/HPF	ELECTRONIC

EMERGENCY RETROFIT KIT

Elite Lighting's BE Series is designed to be used with new or existing compact fluorescent housings where emergency lighting is required. This unit produces 200-625 lumens initial emergency illumination for up to 90 minutes depending on wattage of the lamp used. The BE Series can be used with 7 through 42 watts compact fluorescent 2-pin or 4-pin lamps. It can also be customized to your application.



ITEM NO.	WATTS	LAMP TYPE
BE-13A	7W, 9W, 13W	2 PIN
BE-1826A	18W, 26W	2 PIN
BE-1326A	13W, 18W, 26W, 32W, 42W	4 PIN

BAFFLE FINISH:

W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:

CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:

WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze



General Lighting



Accent Lighting



Task Lighting



Wall Wash Lighting



Sloped Ceiling Lighting