



# B6PL-H

## 6" Compact Fluorescent Horizontal Non-IC Housing

LAMP WATTAGE: UP TO 13W

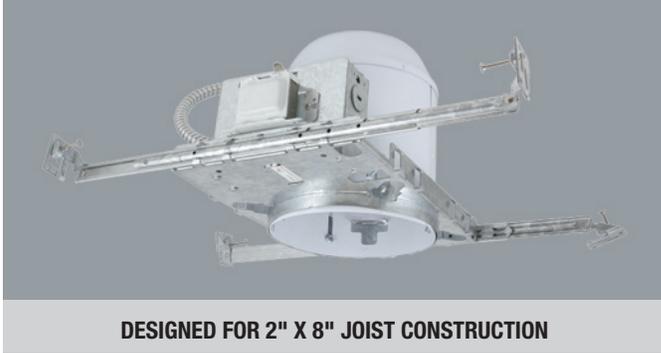

DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

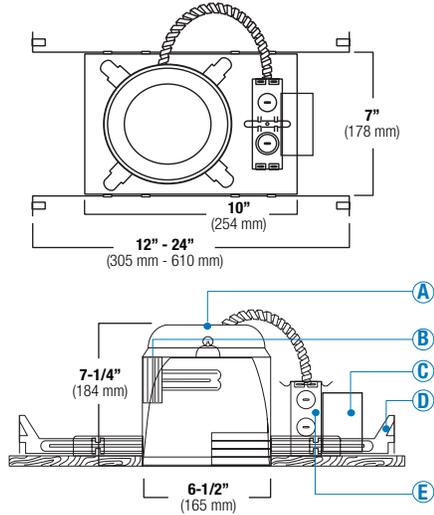

<b>Catalog Number:</b>	
<b>Project Name:</b>	<b>Type:</b>
<b>Note:</b>	



### DESCRIPTION

Thermally protected, specification grade compact fluorescent horizontal housing. For new construction non-insulated ceilings or where insulation can be kept 3" from housing. Accommodates (1 or 2) compact fluorescent lamp. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

### SPECIFICATION


**A. HOUSING** - High temperature painted 22 gauge cold rolled steel construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

**B. SOCKET** - Horizontally mounted plug-in socket. Unitized optics guarantees proper trim to housing installation.

**C. BALLAST** - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Advance.

**D. BAR HANGERS** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

**E. JUNCTION BOX** - Listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

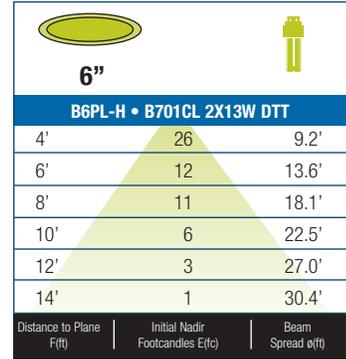

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

### FEATURES

- Integral fluorescent ballast.
- Thermally Protected Non-IC housing.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 7-1/4" height allows use in 2" x 8" joist construction.
- Special screw on the frame locks bar hangers in place which prevents housing from any movement once installed.



**B6PL-H - ITEM SELECTOR:** (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE	BAFFLE	REFLECTOR	TRIM/RING	GLASS
<input type="checkbox"/> 9W	<input type="checkbox"/> 2x9W	<input type="checkbox"/> (E) Electronic	<input type="checkbox"/> MVOLT (120/277)	<input type="checkbox"/> EMG 750 (750 Lumens) <sup>6</sup>	<input type="checkbox"/> BH771	<input type="checkbox"/> B612	<input type="checkbox"/> B658	<input type="checkbox"/> W
<input type="checkbox"/> 13W	<input type="checkbox"/> 2x13W	<input type="checkbox"/> (M) Magnetic <sup>1</sup>	<input type="checkbox"/> 120	<input type="checkbox"/> EMG 1300 (1300 Lumens) <sup>6</sup>	<input type="checkbox"/> B601	<input type="checkbox"/> B645	<input type="checkbox"/> B675	<input type="checkbox"/> P
		<input type="checkbox"/> (S) Energy Star <sup>2</sup>	<input type="checkbox"/> 277	<input type="checkbox"/> EMG-D-750 (750 Lumens) <sup>7</sup>	<input type="checkbox"/> B601L	<input type="checkbox"/> B648	<input type="checkbox"/> B659	<input type="checkbox"/> SN
			<input type="checkbox"/> 347	<input type="checkbox"/> ICE-1300 (1300 Lumens) <sup>8</sup>	<input type="checkbox"/> B605	<input type="checkbox"/> B652	<input type="checkbox"/> B676	<input type="checkbox"/> CP
		<b>DIMMING</b>		<b>OTHER OPTIONS</b>	<input type="checkbox"/> B605L	<input type="checkbox"/> B688	<input type="checkbox"/> B641	<input type="checkbox"/> BZ
		<input type="checkbox"/> Mark 7 <sup>3</sup>		<input type="checkbox"/> FUZE <sup>9</sup>	<input type="checkbox"/> B606	<input type="checkbox"/> B685	<input type="checkbox"/> B635	<input type="checkbox"/> CP
				<input type="checkbox"/> RIF <sup>10</sup>	<input type="checkbox"/> B606L	<input type="checkbox"/> B696	<input type="checkbox"/> B691	<input type="checkbox"/> SN
					<input type="checkbox"/> B656	<input type="checkbox"/> B680	<input type="checkbox"/> B692	<input type="checkbox"/> SHZ
					<input type="checkbox"/> B657	<input type="checkbox"/> B689	<input type="checkbox"/> B695	
					<input type="checkbox"/> B637	<input type="checkbox"/> B642		
					<input type="checkbox"/> B643	<input type="checkbox"/> B636		

<sup>1</sup> - (M) Magnetic = Available only in 9W fixture and not available in MVOLT • <sup>2</sup> - (S) Energy Star = Available on selected fixtures only, please see list above • <sup>3</sup> - MARK 7 = Not available in 9W, 13W, 57W, 70W • <sup>4</sup> - MARK 10 = Not available in 9W, 13W, 57W, 70W, must specify voltage • <sup>5</sup> - LUT-E (EC3D) = Not available in 9W, 13W, 57W, 70W • <sup>6</sup> - EMG = Emergency battery pack w/ remote test switch • <sup>7</sup> - EMG-D = Emergency battery pack w/ remote test switch for damp location • <sup>8</sup> - ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • <sup>9</sup> - FUZE = Single slow-blow fuse • <sup>10</sup> - RIF = Radio interference filter

### Specifications:

**B6PL-H**     WATT     BALLAST     VOLTAGE     EMERGENCY     OPTIONS     TRIM TYPE     REFLECTOR     BAFFLE     RING     GLASS

BAFFLE	REFLECTOR	TRIM/RING
<b>W</b> White	<b>CL</b> Chrome	<b>WH</b> White
<b>P</b> Black	<b>RG</b> Gold	<b>BK</b> Black
<b>SN</b> Satin Nickel	<b>W</b> White	<b>SN</b> Satin Nickel
<b>CP</b> Copper	<b>MB</b> Black	<b>CP</b> Copper
<b>BZ</b> Bronze	<b>BZ</b> Bronze	<b>CH</b> Chrome
	<b>CP</b> Copper	<b>PB</b> Polish Brass
	<b>SN</b> Satin Nickel	<b>BZ</b> Bronze
	<b>SHZ</b> Satin Haze	

Sample of Catalog Number: **B6PL-H-13W-E-MVOLT-EMG750-BH771CL-WH**

\*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ [www.iuseelite.com](http://www.iuseelite.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

# 6" Horizontal CFL Trims

(LAMP WATTAGE: UP TO 13W / 2X13W)







Catalog Number:

Project Name:

Type:

Note:



<p><b>BH771CL-WH REFLECTOR</b></p>  <p><b>REFLECTOR FINISH:</b> CL, RG, W, MB, CP, SN, SHZ</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>7-1/4"</p>	<p><b>B601SN METAL ALBALITE LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> ALBALITE</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B601L PLASTIC ALBALITE LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> ALBALITE</p> <p><b>TRIM/RING FINISH:</b> WHITE PLASTIC</p>  <p>8"</p>	<p><b>B605CH METAL FRESNEL LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> FRESNEL</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>
<p><b>B605L PLASTIC FRESNEL LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> FRESNEL</p> <p><b>TRIM/RING FINISH:</b> WHITE PLASTIC</p>  <p>8"</p>	<p><b>B606CP METAL DROP OPAL LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> DROP OPAL</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B606L PLASTIC DROP OPAL LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> DROP OPAL</p> <p><b>TRIM/RING FINISH:</b> WHITE PLASTIC</p>  <p>8"</p>	<p><b>B656W-WH BAFFLE W/ FROSTED DOME SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>BAFFLE FINISH:</b> W, P, SN, CP, BZ</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>7-1/4"</p>
<p><b>B657CL-WH REFLECTOR W/ FROSTED DOME SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>REFLECTOR FINISH:</b> CL, RG, W, MB, CP, SN, SHZ</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>7-1/4"</p>	<p><b>B737W-WH BAFFLE W/ DROP OPAL LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>BAFFLE FINISH:</b> W, P, SN, CP, BZ</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>7-1/4"</p>	<p><b>B643RG-WH REFLECTOR W/ DROP OPAL LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>REFLECTOR FINISH:</b> CL, RG, W, MB, CP, SN, SHZ</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>7-1/4"</p>	<p><b>B612WH SMOOTH FROST DOME SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> FROSTED</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>
<p><b>B645WH DESIGNER POINT SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> FROSTED/CLEAR</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B648WH DESIGNER CONE SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> FROSTED</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B652WH SMOOTH FROST SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> FROSTED</p> <p><b>TRIM/RING FINISH:</b> WH, BK, SN, CP, CH, PB, BZ</p>  <p>8"</p>	<p><b>B688WH SQUARE ALBALITE SHOWER LENS</b></p>  <p><b>FOR WET LOCATION</b></p> <p><b>LENS:</b> WHITE</p> <p><b>TRIM/RING FINISH:</b> WH</p>  <p>7-1/2"</p>

# 6" Horizontal CFL Trims

( LAMP WATTAGE: UP TO 13W / 2X13W)

Catalog Number:

Project Name:

Type:

Note:




**B685WH**  
SQUARE FRESNEL SHOWER LENS



LENS:  
FROSTED

TRIM/RING FINISH:  
WH




7-1/2"

**B696WH**  
SQUARE DROP OPAL SHOWER LENS



LENS:  
DROP OPAL

TRIM/RING FINISH:  
WH




7-1/2"

**B680WH**  
SQUARE DESIGNER POINT SHOWER LENS



LENS:  
FROSTED/CLEAR

TRIM/RING FINISH:  
WH




7-1/2"

**B689WH**  
SQUARE DESIGNER CONE SHOWER LENS



LENS:  
FROSTED

TRIM/RING FINISH:  
WH




7-1/2"

**B642CL-WH**  
REFLECTOR W/ FRESNEL LENS



REFLECTOR FINISH:  
CL, RG, W, MB, CP,  
SN, SHZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




7-1/4"

**B636P-WH**  
BAFFLE W/ FRESNEL LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



7-1/4"

**B658CL-WH**  
REFLECTOR W/ PRISMATIC LENS



REFLECTOR FINISH:  
CL, RG, W, MB, CP,  
SN, SHZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




7-1/4"

**B675W-WH**  
BAFFLE W/ PRISMATIC LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




7-1/4"

**B659CL-WH**  
REFLECTOR W/ FROSTED LENS



REFLECTOR FINISH:  
CL, RG, W, MB, CP,  
SN, SHZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




7-1/4"

**B676W-WH**  
BAFFLE W/ FROSTED LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




7-1/4"

**B641RG-WH**  
REFLECTOR W/ ALBALITE LENS




REFLECTOR FINISH:  
CL, RG, W, MB, CP,  
SN, SHZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ




7-1/4"

**B635P-WH**  
BAFFLE W/ ALBALITE LENS



BAFFLE FINISH:  
W, P, SN, CP, BZ

TRIM/RING FINISH:  
WH, BK, SN, CP, CH,  
PB, BZ



7-1/4"

**B691CL\***  
DECO GLASS REFLECTOR



REFLECTOR FINISH:  
CL, WT, MB, SHZ, W

TRIM/RING FINISH:  
WH, SHZ

\*GLASS FINISH:  
BLUE, RED, GREEN, FROST



7-3/8"

**B692CL\***  
DOUBLE RING GLASS



REFLECTOR FINISH:  
CL, WT, MB, SHZ, W

TRIM/RING FINISH:  
WH, SHZ

\*GLASS FINISH:  
BLUE, RED, GREEN, FROST



7-3/8"

**B695CL\***  
TRIPLE RING GLASS



REFLECTOR FINISH:  
CL, WT, MB, SHZ, W

TRIM/RING FINISH:  
WH, SHZ

\*GLASS FINISH:  
BLUE, RED, GREEN, FROST



7-3/8"