





DIMENSION

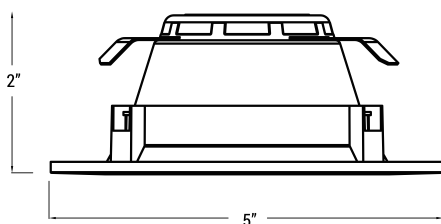

INSTALLATION

Ez connector to use with special high efficacy housing or Edison base adapter for retrofitting into existing 4" incandescent housings.

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

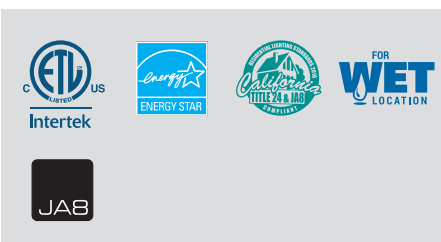

CERTIFICATIONS

- cULus
- RoHS
- IECC
- LM97/LM80
- California Title 24
- New York State
- Washington State

ENGINEERED FOR VERSATILITY AND PERFORMANCE

The Elite RL432 has been engineered for IC-New Construction, Remodel and Retrofit applications for 4 inch downlights. Dedicated housings install the same way as our standard incandescent downlights. Over 700 usable lumens are directed from the luminaire to the work surface. Lighting is smooth and comfortable, all while using 75% less energy than the equivalent 50W BR20 and 25% less than the common 18W CFL. Plus the Elite RL432 features 50,000hrs of life, and California Title-24 compliance.

INPUT VOLT.	INPUT FREQ.	THD	POWER FACTOR	INPUT POWER	LUMENS
120	50/60Hz	<20%	>0.9	9W(+/-5%)	700

FEATURES

Greater light output than an 18W CFL or a 50W BR20 while consuming less than 9W of power.

OPTICS

The Elite-Engineered LED Module system is much more than just a simple LED retrofit. The Elite LED system is a highly engineered work of design and optical science which produces over 700 lumens! Our meticulously crafted optics gather the light scattered by the LED chip and shape it into a functional beam with uniform light distribution. The baffle also offers the benefits of a smooth integrated light with glare reduction at a 55 degree cut-off, which minimizes brightness.

DURABILITY

Non-conductive housing and heat management system are engineered for extremely long life and service period. Without proper heat management, any LED luminaire will fail. Life tests have shown the Elite RL432 light output will be maintained at 70% of initial at 50,000 hours of operation. Our LED driver is rated for 50 to 60 Hz at 120V input, produces less than 20% THD, has a power factor between 0.90 and 1.00 and is thermal protected for additional safety.

REPEATABLE

Repeatability means quality. From our chip selection process, to our driver, to the thermal management, the Elite RL432 Module is engineered for quality. All Elite LED luminaires are rated at 85+ and 90+ CRI, also rated and tested to LM-79 and LM-80 standards by a certified laboratory, and meets the California Title-24 compliance standards. Elite's highly selective LED chips produce zero ultraviolet and virtually no infrared light.

DIMMABLE

The Elite RL432 lighting system is dimmable down to 10% by using an approved incandescent dimmer or select electronic low voltage dimmers when ordered with DIMTR-120 option. Refer to dimming matrix for more information.

INTERCHANGEABLE

The Elite RL432 LED system works in our dedicated (LD4IC-AT, LD4RIC-AT) housings and our existing 4" incandescent housings (B4IC-AT, B4RIC-AT) but is also suitable for use in most 4" recessed downlight housings.

ADAPTABLE

All Elite RL432 luminaires are shipped standard with our custom engineered Edison adapter. This adapter assembly allows the luminaires to install directly into existing Elite 4" downlight housings and most other 4" downlight housings. GU24 style socket base adapters also available upon request.

OUR WORD

The Elite LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)

Ordering Guide for Compatible Housing

IC - New Construction	Non-IC New Construction	IC - For Remodel	Non-IC For Remodel
LD4IC-AT	LD4-AT	LD4RIC-AT	LD4R-AT
HLD4IC-AT	HLD4-AT		HLD4R-AT
B4IC-AT	B4-AT		B4R-AT

Example: **RL432-700L-DIMTR-120-30K-90-WH**

TYPE	PERFORMANCE	CCT	CRI	FINISH	OPTION
RL432 (BAFFLE)	<input type="checkbox"/> 700L-DIMTR-120	<input type="checkbox"/> 27K <input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> 90+	<input type="checkbox"/> W-WH	<input type="checkbox"/> GU24SA- GU24 SOCKET ADAPTER